


Type:	SSC-T30I	REV: 1.3
Issued:	04/03/2016	PB
Modified:	29/11/2022	KS

Single jacket cable with central tube, glass yarn reinforcement, and corrugated steel armouring - SSC-T30I

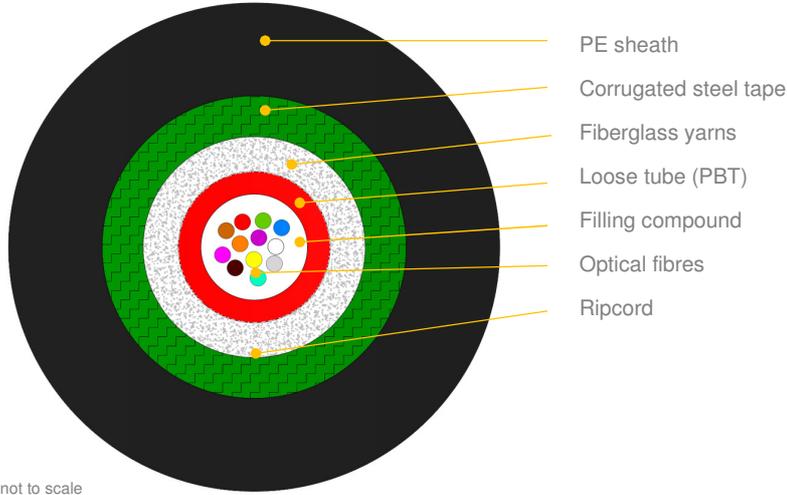

*schematic drawing, not to scale

APPLICATION:

For installation into existing duct or directly buried
Rodent retardant

DESIGN:

Loose tube (PBT Ø 3.0mm) with filling compound
Optical fibres
Fibreglass yarns as strain relief
Corrugated steel tape armouring
UV stabilized PE sheath (black)

CABLE DESIGNS:

Variant	Quantity [pcs]				Ø nominal (±5%)	Nominal weight (±10%)	Max short term tensile load	Max long term tensile load
	Fibres	Fibres per tube	Total elements	Active tubes				
	[mm]	[kg/km]	[N]	[N]				
1T x 2-24F	2-24	2-24	1	1	7,6	69	1800	900
Other designs on demand								

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Crush performance:	3000 [N/10 cm]	IEC 60794-1-21-E3, Δα reversible
Bending radius:	Static: 20 x D Dynamic: 30 x D	IEC 60794-1-21-E6, Δα≤0,05 dB
Water penetration:	3[m] sample, 1[m] head, 24[h]	IEC 60794-1-22-F5, no leakage
Temperature range		IEC 60794-1-22-F1, Δα≤0,05 dB/km
Installation:	-15... +55 [°C]	
Operation:	-40... +70 [°C]	
Transport & Storage:	-40... +70 [°C]	

OPTICAL FIBRE AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFPP document.

Type:	SSC-T30I	REV: 1.3
Issued:	04/03/2016	PB
Modified:	29/11/2022	KS

MARKING

The following print (hot stamped, laser or other suitable printing method) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example:

FIBRAIN SSC-T30I T30 12F SM G652D 1T12F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 1\%$. Remarkings is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH

2000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.