



TRENDNET[®]

PRODUCT CATALOG

[MULTI-GIGABIT](#)

[SWITCHES](#)

[PoE](#)

[INDUSTRIAL](#)

[FIBER](#)

[WIRELESS](#)

[SURVEILLANCE](#)

[MORE](#)

Multi-Gigabit4
 Managed & Unmanaged Switches
 SFP+ Switches & SFP+ Modules
 PoE+ & PoE ++ Switches
 Network Adapters
 PoE Injectors See PoE Switches & Industrial PoE
 Fiber Media ConvertersSee Fiber

Network Cloud Management7
 TRENDnet Hive

Network Switches8
 Managed & Unmanaged Switches

PoE Switches10
 PoE, PoE+, & PoE++ Switches
 Managed & Unmanaged Switches
 Smart Surveillance Switches
 Long Range PoE+
 Injectors, Extenders, & Splitters

IP Power15
 Power Distribution Unit

Fiber16
 Media
 Converters SFP
 Modules

Industrial18
 Managed & Unmanaged Switches
 PoE+ & PoE++ Switches
 Specialty Switches (Variable Voltage, EN50155, Front
 Access) Injectors, Extenders, & Splitters
 Fiber Media Converters & SFP Modules
 Wireless Routers
 Modbus Gateways

Wireless25
 SMB Routers
 Indoor Access Points
 Outdoor Access Points

Surveillance28
 PoE Network Cameras
 Network Video Recorders

Additional Product Categories29
 Powerline · MoCA® · USB · USB-C · WiFi Presentation
 Home Wireless · KVMs · Patch Panels

Contact TRENDnet30



TRENDnet's vision is to build innovative, easy-to-use, and reliable Networks People Trust™. TRENDnet solutions network countless devices to enable your connected lifestyle and workplace. Building award-winning networking solutions since 1990, TRENDnet connects you with what you value most. Founded in Torrance, California, TRENDnet has grown to become a leading global networking hardware brand.



Multi-Gigabit Managed Switches

See more Multi-Gigabit PoE solutions in the PoE Switches section.



	L2 SFP/SFP+ Switches		10G Web Smart Switches				10G Web Smart PoE+ Switches			
	TL2-F7120	TL2-F70284	TEG -7124WS	TEG-3102WS	TEG-3524S	TEG -30284	TPE-3524SF	TPE-3524S	TPE-3102WS	TPE-30284
Ports	12 x SFP+, 24 x Gigabit SFP, 1 x RJ-45 Console 4 x 10G SFP+		8 x 10G, 4 x 10G SFP+	8 x 2.5G, 2 x 10G SFP+	48 x Gigabit, 4 x 10G SFP+	24 x Gigabit, 4 x 10G SFP+	48 x Gigabit PoE+, 4 x 10G SFP+	48 x Gigabit PoE+, 4 x 10G SFP+	8 x 2.5G PoE+, 2 x 10G SFP+	24 x Gigabit PoE+, 4 x 10G SFP+
PoE power budget	-	-	-	-	-	-	740W	410W	-	370W
Max. power per port	-	-	30W	30W	30W	30W	30W	30W	240W	30W
Switching capacity	240Gbps 128Gbps		240Gbps	80Gbps	176Gbps	128Gbps	176Gbps	176Gbps	30W	128Gbps
Jumbo frames	10KB 12KB		10KB	10KB	10KB	10KB	9KB	9KB	80Gbps	10KB
RAM buffer	2MB-		16MB	1.5MB	2MB	1.5MB	2MB	2MB	10KB	1.5MB
Forwarding rate (64-byte packet size)	178.6Mpps 95.2Mpps		178.56Mpps	178.56Mpps	130.95Mpps	95.2 Mpps	130.95Mpps	130.95Mpps	1.5 MB	95.2Mpps
MAC address table	32K 32K		32K	16K	32K	16K	32K	32K	178.56Mpps	16K
VLAN	Asymmetric, port-based, multiple management assignment, up to 256 VLAN groups, 802.1Q, dynamic GVRP, private, voice			Asymmetric, port-based, 802.1Q, private, voice, GVRP			Asymmetric, port-based, 802.1Q, private, voice, GVRP			
ACL	IPv4 L2-L4 & IPv6		IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6
IPv6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Static IP routing	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
DoS prevention	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1ab LLDP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LACP (802.3ad)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP
Multicast (IGMP)	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3
SNMP	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
Fan	Smart fan	Smart fans	Smart fan	Fanless	Smart fan	Fanless	Smart fans	Smart fans	Smart fans	Smart fans
Power supply	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal
Mounting	Rack	Rack	Rack	-	Rack	Rack	Rack	Rack	Rack	Rack
Cloud	-	-	-	-	-	Hive compatible**	-	-	-	Hive compatible**
TAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com. **Additional fee applies.

Not available in Europe / UK.

Multi-Gigabit Unmanaged Switches



	10G Unmanaged Switches				2.5G Unmanaged Switches						
	TEG - S 7102	TEG-S750	TEG-	TEG-30262	TEG-	TEG-S5091	TEG-S380	TEG-S5061	TEG-S350	TEG-S562	TEG-S327
Ports	8 x 10G, 2 x 10G SFP+	5 x 10G	S762 4 x 2.5G,	24 x Gigabit, 2 x 10G SFP+	S591 8 x 2.5G,	8 x 2.5G, 1 x 10G SFP+	8 x 2.5G	5 x 2.5G, 1 x 10G SFP+	5 x 2.5G	4 x 2.5G, 2 x 10G SFP+	2 x 2.5G, 5 x Gigabit
Switching capacity	200Gbps	60Gbps	2 x 10G	88 Gbps	1 x 10G	60Gbps	40 Gbps	45Gbps	25Gbps	60Gbps	20Gbps
Jumbo frames	12KB	9KB	60Gbps	10KB	60Gbps	12KB	12KB	12KB	12KB	12KB	15KB
RAM bu er	2MB	2MB	9KB	1.5MB	12KB	1MB	1.5MB	1MB	1.5MB	1MB	384KB
Forwarding rate (64-byte packet size)	144.8Mpps	44.64Mpps	2MB	65.5Mpps	1MB	44.64Mpps	29.76Mpps	33.8Mpps	18.6Mpps	44.64Mpps	14.88Mpps
MAC address table	32K	16K	44.64Mp	16K	44.64Mp	4K	16K	4K	16K	4K	2K
Fan	1	Fanless	ps	Fanless	ps	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
Power supply	External	External	16K	Internal	4K	External	External	External	External	External	External
Mounting	Rack	-	Fanless	Rack	Fanless	Wall	Wall	Wall	Wall	Wall	Wall
TAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	External	-	Extērnal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	Wall	<input type="checkbox"/>	Wall	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*



	2.5G Unmanaged PoE+ Switches		
	TPE-TG380	TPE-TG350	TPE-TG327
Ports	8 x 2.5G PoE+	4 x 2.5G PoE+, 1 x 2.5G PoE+	2 x 2.5G PoE+, 5 x Gigabit PoE+
PoE power budget	100W	55W	70W
Max. power per port	30W	30W	30W
Switching capacity	40 Gbps	25 Gbps	20Gbps
Jumbo frames	12KB	12KB	15KB
RAM bu er	1.5MB	1.5MB	384KB
Forwarding rate (64-byte packet size)	29.76Mpps	18.6Mpps	14.88Mpps
MAC address table	16K	16K	2K
Fan	Fanless	Fanless	Fanless
Power supply	External	External	External
Mounting	Wall	Wall	Wall
TAA/NDAA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
compliant Warranty	Lifetime*	Lifetime*	Lifetime*

Multi-Gigabit Network Adapters & 10G SFP+ Modules

See more Multi-Gigabit Fiber solutions in the Fiber section.



Multi-Gigabit Network Adapters

TEG-10GECTX TEG-10GECSFP TEG-25GECTX


Ports	1 x 10G BASE-T1 x 10G SFP+1 x 2.5GBASE-T		
Speed	10Gbps, 2.5Gbps, 1Gbps10Gbps2.5Gbps, 1Gbps, 100Mbps		
Features	Includes standard and low-profile brackets		
Form connector	PCIe 2.0 x 4PCIe 2.0 x 4PCIe 2.0 x 1		
802.1Q VLAN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Jumbo frames	16KB	16KB	9KB
OS compatibility	Windows®, Windows® server		
TAA compliant	<input type="checkbox"/>	-	<input type="checkbox"/>
NDA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year	3 year



10G Fiber SFP+ Modules

TEG -10GBS40 TEG -10GBS10 TEG -10GBSR TEG -10GBRJ

Distance	40km (24.9 mi.)	10km (6.2 mi.)	550m (1804 ft.)	30m (98 ft.)
Interface	Duplex LC	Duplex LC	Duplex LC	RJ-45
Speed	10G	10G	10G	10G
Mode	Single	Single	Multi	Copper
Digital Diagnostics Monitoring (DDM)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wavelength	1550nm	1310nm	850nm	-
TAA/NDA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*

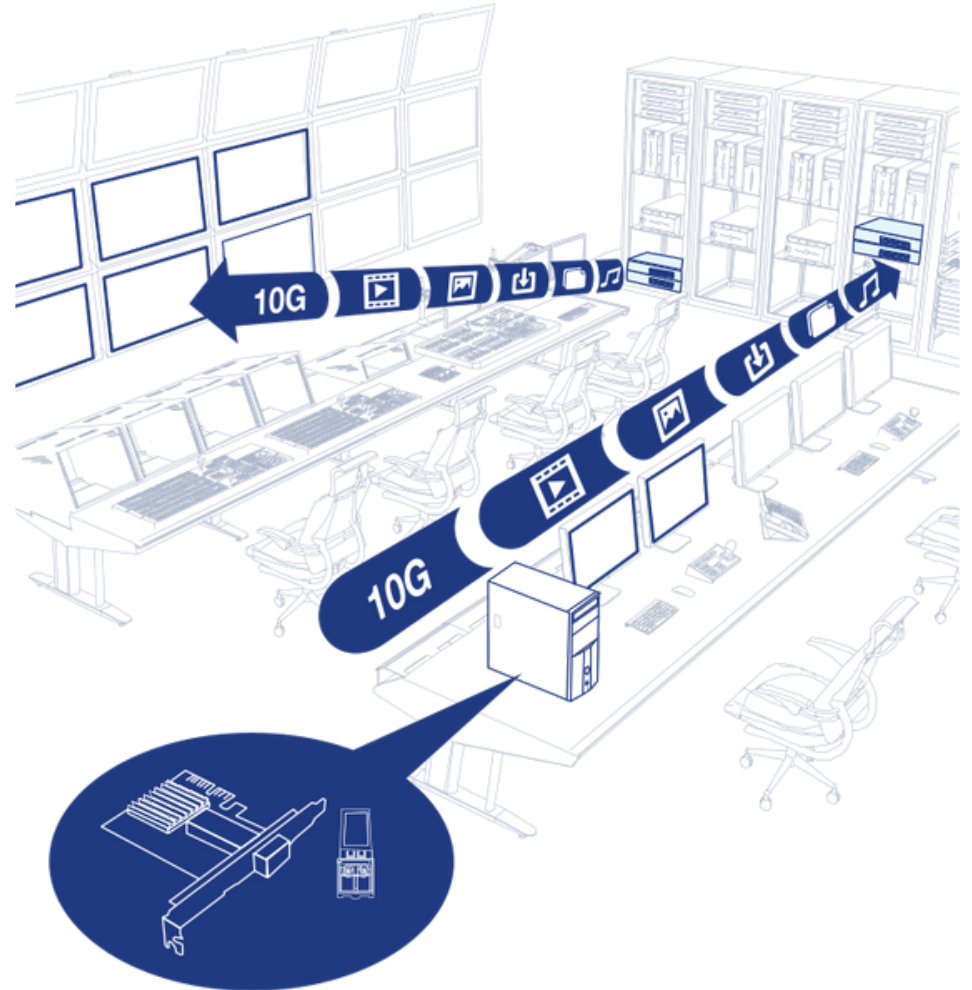

TEG-10GECSFP + TEG-10GBSR

*See warranty policy at TRENDnet.com.



Network Cloud Manager

- Centralized management
- Hassle-free remote monitoring
- Intuitive alerts and notifications
- Reduce management time and costs
- Easily scalable for future expansions & upgrades
- Free mobile app support



Learn more and sign up at trendnet.com/hive

L2 Managed & Web Smart Switches



	L2 Managed	Web Smart			
	TL2-G244	TEG-524WS	TEG-284WS	TEG-204WS	TEG-082WS
Ports	20 x Gigabit, 4 x Shared Gigabit (RJ-45/SFP), 1 x RJ-45 Console	48 x Gigabit, 4 x Shared Gigabit (RJ-45/SFP)	24 x Gigabit, 16 x Gigabit, 4 x Shared Gigabit (RJ-45/SFP)	4 x Shared Gigabit (RJ-45/SFP)	8 x Gigabit, 2 x SFP
Switching capacity	48Gbps	104Gbps	56Gbps	40Gbps	20Gbps
Jumbo frames	10KB	10KB	10KB	10KB	10KB
RAM buffer	1MB	1.5MB	512KB	512KB	512KB
Forwarding rate (64-byte packet size)	35.7Mpps	77.4Mpps	41.7Mpps	29.8Mpps	14.9Mpps
MAC address table	16K	16K	8K	8K	8K
VLAN	Asymmetric, port-based, 802.1Q, private, voice, GVRP, MAC-based, protocol-based IPv4 L2-L4 & IPv6	Asymmetric, port-based, 802.1Q, private, voice, GVRP IPv4 L2-L4 & IPv6			
ACL		IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6
IPv6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Static IP routing	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DoS prevention	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1ab LLDP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LACP (802.3ad)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Multicast (IGMP)	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP
SNMP	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3
Fan	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
Power supply	Fanless	Fanless	Fanless	Fanless	Fanless
Mounting	Internal	Internal	Internal	Internal	External
Cloud management	Rack	Rack	Rack	Rack	Rack
TAA/NDAA compliant	-	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**
Warranty	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com**Additional fee applies.

Not available in Europe / UK.

Unmanaged Switches

	Gigabit Unmanaged Metal							
	TEG-S25	TEG-S24g	TEG-S25D	TEG-S 24 D g	TEG - S17	TEG-S16g	TEG-S17D	TEG-S16Dg
Ports	24 x Gigabit	24 x Gigabit	24 x Gigabit	24 x Gigabit	16 x Gigabit	16 x Gigabit	16 x Gigabit	16 x Gigabit
Switching capacity	48Gbps	48Gbps	48Gbps	48Gbps	32Gbps	32Gbps	32Gbps	32Gbps
Jumbo frames	9KB	10KB	9KB	10KB	9KB	10KB	9KB	10KB
RAM buffer	512KB	512KB	512KB	512KB	512KB	512KB	512KB	512KB
MAC address table	8K	8K	8K	8K	8K	8K	8K	8K
Fan	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
Power supply	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal
Mounting	Rack	Rack	Rack	ETH-11MK**	Rack	Rack	Rack	ETH-11MK**
GREENnet	-	<input type="checkbox"/>	-	<input type="checkbox"/>	-	<input type="checkbox"/>	-	<input type="checkbox"/>
TAA/NDA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

	Gigabit Unmanaged Metal						10/100 Unmanaged Plastic	
	TEG-S82g	TEG-S80g	TEG-S83	TEG-S50g	TEG-S51	TEG-S51SFP	TE100-S8	TE100-S5
Ports	8 x Gigabit	8 x Gigabit	8 x Gigabit	5 x Gigabit	5 x Gigabit	4 x Gigabit, 1 x SFP	8 x 10/100Mbps	5 x 10/100Mbps
Switching capacity	16Gbps	16Gbps	16Gbps	10Gbps	10Gbps	10Gbps	1.6Gbps	1Gbps
Jumbo frames	9KB	9KB	9KB	9KB	9KB	9KB	-	-
RAM buffer	192KB	192KB	192KB	128KB	128KB	128KB	56KB	56KB
MAC address table	4K	4K	4K	2K	2K	2K	1K	1K
Fan	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
Power supply	External	External	External	External	External	External	External	External
Mounting	Wall	Wall	-	Wall	-	Magnet	-	-
GREENnet	<input type="checkbox"/>	<input type="checkbox"/>	-	<input type="checkbox"/>	-	-	<input type="checkbox"/>	<input type="checkbox"/>
TAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-	-
NDA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty*		Lifetime* Lifetime*		Lifetime*	Lifetime*	Lifetime*	3 year	3 year

Managed PoE Switches




Gigabit Web Smart PoE+

	TPE-5048 WS	TPE-5240 WS	TPE-5028WS	TPE-2840WS	TPE-1620WSF	TPE-1620WS	TPE-1021WS	TPE-082WS
Ports	48 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	48 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	24 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	24 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	16 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	16 x Gigabit PoE+, 4 x Shared Gigabit (RJ-45/SFP)	8 x Gigabit PoE+, 2 x SFP	8 x Gigabit PoE+, 2 x SFP
PoE budget	740W	370W	370W 185W 370W 185W				130W	75W
Max. power per port	30W	30W	30W 30W 30W 30W				30W	30W
Switching capacity	104Gbps	104Gbps	56Gbps 56Gbps 40Gbps 40Gbps				20Gbps	20Gbps
Jumbo frames	10KB	10KB	10KB 10KB 10KB 10KB				10KB	10KB
RAM buffer	1.5MB	1.5MB	512KB 512KB 512KB 512KB				512KB	512KB
Forwarding rate	77.4Mpps	77.4Mpps	41.7Mpps 41.7Mpps 29.8Mpps 29.8Mpps				14.9Mpps	14.9Mpps
MAC address table	16K	16K	8K8K 8K8K				8K	8K
VLAN	Asymmetric, port-based, 802.1Q, private, voice, GVRP, multicast							
ACL	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6	IPv4 L2-L4 & IPv6
IPv6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Static IP routing	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DoS prevention	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1ab LLDP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LACP (802.3ad)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Multicast (IGMP)	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP	STP, RSTP, MSTP
SNMP	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3
Fan	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
Power supply	Smart fans	Smart fans	Smart fans	Smart fans	Smart fans	Smart fans	Fanless	Fanless
Mounting	Internal	Internal	Internal	Internal	Internal	Internal	Internal	External
Cloud management	Rack	Rack	Rack	Rack	Rack	Rack	Rack	Rack
TAA/NDAA compliant	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**	Hive compatible**
Warranty	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com **Additional fee applies. †Not available in Europe / UK.

Smart Surveillance Switches

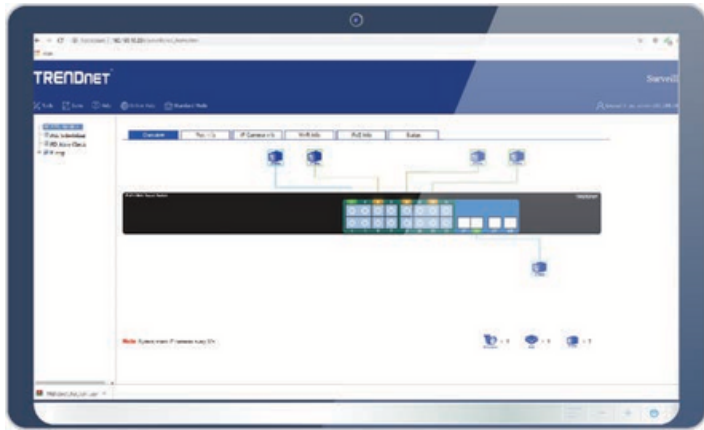

ONVIF® Conformant
Profile Q




PoE Self-Healing
PoE device auto-recovery & power scheduling



Manage Cameras
from switch interface



Real-Time Data
for monitoring & troubleshooting



Extend PoE Signal
up to 656 ft./200m at 10Mbps



Front Panel LED
displays PoE power statistics








Gigabit Web Smart PoE+

TPE-3018LS TPE-3012LS

Ports	16 x Gigabit PoE+, 8 x Gigabit PoE+, 2 x Shared Gigabit (RJ-45/SFP) 2 x Gigabit, 2 x SFP	
PoE budget	220W 110W	
Max. power per port	30W 30W	
Switching capacity	36Gbps 24Gbps	
Jumbo frames	10KB 10KB	
RAM buffer	512KB 512KB	
Forwarding rate	26.7Mpps 17.8Mpps	
MAC address table	8K8K	
VLAN	Asymmetric, port-based, 802.1Q, private, voice, GVRP	
ACL	IPv4 L2-L4 & IPv6 IPv4 L2-L4 & IPv6	
IPv6	<input type="checkbox"/>	<input type="checkbox"/>
Static IP routing	<input type="checkbox"/>	<input type="checkbox"/>
DoS prevention	<input type="checkbox"/>	<input type="checkbox"/>
802.1ab LLDP	<input type="checkbox"/>	<input type="checkbox"/>
802.1X	<input type="checkbox"/>	<input type="checkbox"/>
LACP (802.3ad)	<input type="checkbox"/>	<input type="checkbox"/>
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	STP, RSTP, MSTP	STP, RSTP, MSTP
Multicast (IGMP)	v1, v2, v3	v1, v2, v3
SNMP	v1, v2c, v3	v1, v2c, v3
Fan	Smart fan	Fanless
Power supply	Internal	Internal
Mounting	Rack	Rack
TAA/NDA	<input type="checkbox"/>	<input type="checkbox"/>
compliant Warranty	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com.

Managed PoE Switches

					
	10/100 Web Smart PoE+	Gigabit EdgeSmart PoE+			EdgeSmart PoE Powered
	TPE-224WS	TPE-TG 262ES	TPE-TG 182ES	TPE-TG82ES	TPE-P521ES
Ports	4 x 10/100Mbps PoE+, 20 x 10/100Mbps PoE, 2 x Gigabit, 2 x Shared Gigabit (RJ-45/SFP)	24 x Gigabit PoE+	16 x Gigabit PoE+, 2 x Gigabit SFP	8 x Gigabit PoE+	1 x Gigabit PoE+ in, 2 x Gigabit PoE out, 2 x Gigabit
PoE budget	193W	380W	240W	64W	18W (PoE+ in), 8W (PoE in)
Max. power per port	30W	30W	30W	30W	18W
Switching capacity	12.8Gbps	52Gbps	36Gbps	16Gbps	10 Gbps
Jumbo frames	-	10KB	10KB	9KB	9KB
RAM buffer	512KB	512KB	512KB	192KB	512KB
Forwarding rate	9.5Mpps	38.7Mpps	26.8Mpps	11.9Mpps	7.4Mpps
MAC address table	8K	8K	8K	4K	2K
VLAN	Asymmetric, port-based, 802.1Q, private, voice, GVRP IPv4 L2-L4 & IPv6	Asymmetric, port-based, 802.1Q, private, voice			Asymmetric, port-based, 802.1Q, private, voice
ACL		-	-	-	-
IPv6	<input type="checkbox"/>	-	-	-	-
Static IP routing	<input type="checkbox"/>	-	-	-	-
DoS prevention	<input type="checkbox"/>	-	-	-	-
802.1ab LLDP	<input type="checkbox"/>	-	-	-	-
802.1X	<input type="checkbox"/>	-	-	-	-
LACP (802.3ad)	<input type="checkbox"/>	-	-	-	-
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	STP, RSTP, MSTP	STP, RSTP	STP, RSTP	STP, RSTP	STP, RSTP
Multicast (IGMP)	v1, v2, v3	64 v1, v2, v3 W	v1, v2, v3	v1, v2, v3	v1, v2, v3
SNMP	v1, v2c, v3	v1, v2c	v1, v2c	v1, v2c	v1, v2c
Fan	Smart fans	Smart fans	Smart fan	Fanless	Fanless
Power supply	Internal	Internal	Internal	External	-
Mounting	Rack	Rack	Rack	Wall	Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com Not available in Europe / UK.

Unmanaged PoE Switches & PoE Solutions

	Long Range PoE+			Gigabit PoE++		High Power PoE+	
	TPE-LG80	TPE-TG51g	TPE-LG50	TPE-BG182g	TPE-BG102g	TPE-TG182F	TPE-TG80F
Ports	8 x Gigabit PoE+	4 x Gigabit PoE+, 1 x Gigabit	4 x Gigabit PoE+, 1 x Gigabit	8 x Gigabit PoE++, 8 x Gigabit PoE+, 2 x SFP	4 x Gigabit PoE++, 4 x Gigabit PoE+, 2 x SFP	16 x Gigabit PoE+, 2 x Shared Gigabit (RJ-45/SFP)	8 x Gigabit PoE+
PoE budget	65W	60W	32W	440W	240W	440W	240W
Max. power per port	30W	30W	30W	95W	95W	30W	30W
Switching capacity	16Gbps	10Gbps	10 Gbps	36Gbps	20Gbps	36Gbps	16Gbps
Jumbo frames	9KB	9KB	9KB	9KB	9KB	9KB	9KB
RAM buffer	192 KB	128 KB	128 KB	512KB	512KB	512KB	192KB
MAC address table	4K	2K	2K	8K	8K	8K	4K
Fans	Fanless	Fanless	Fanless	Fanless	Fanless	1	Fanless
Power supply	External	External	External	Internal	Internal	Internal	Internal
Mounting	Wall	Wall	Wall	Rack	Rack	Rack	Rack
TAA/NDAA	☐	☐	☐	☐	☐	☐	☐
compliant Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

Injectors					Extenders			Splitters
TPE - 319 G I	TPE-215GI	TPE-119GI	TPE-117GI	TPE-115GI	TPE-BE200	TPE-E100	TPE-E110	TPE-104GS
10G PoE++ Injector	2.5G PoE+ Injector	Gigabit PoE++ 90W Injector	Gigabit Ultra PoE 60W Injector	Gigabit PoE+ 30W Injector	Gigabit PoE++ Extender Amplifier	Gigabit PoE+ Extender / Gigabit PoE+ Extender		Gigabit PoE Splitter
TAA/NDAA compliant	TAA/NDAA compliant	TAA/NDAA compliant	NDAA compliant	NDAA compliant	TAA/NDAA compliant	NDAA compliant	NDAA compliant	NDAA compliant
Converts a network data signal into a PoE Ethernet connection					Extends a PoE network connection for up to 100m (328 ft.) without the use of a power adapter			Splits a PoE signal into separate data and power sources

Unmanaged PoE Switches



Gigabit PoE+

	TPE-TG262	TPE-TG240g	TPE-TG182	TPE-TG160g	TPE-TG161H	TPE-TG160H	TPE-TG80g	TPE-TG84
Ports	24 x Gigabit PoE+, 2 x Gigabit SFP	24 x Gigabit PoE+	16 x Gigabit PoE+, 2 x Gigabit SFP	16 x Gigabit PoE+	16 x Gigabit PoE+	16 x Gigabit PoE+	8 x Gigabit PoE+	8 x Gigabit PoE+
PoE budget	380W	370W	240W	246W	120W	123W	123W	120W
Max. power per port	30W	30W	30W	30W	30W	30W	30W	30W
Switching capacity	52Gbps	48Gbps	36Gbps	32Gbps	32Gbps	32Gbps	16Gbps	16Gbps
Jumbo frames	10KB	10KB	9KB	10KB	10KB	10KB	9KB	9KB
RAM buffer	512KB	512KB	512KB	512KB	512KB	512KB	128KB	192KB
MAC address table	8K	8K	8K	8K	8K	8K	4K	4K
Fans	2	2	1	2	Fanless	Fanless	Fanless	Fanless
Power supply	Internal	Internal	Internal	Internal	External	External	External	External
Mounting	Rack	Rack	Rack	Rack	Rack	Rack	-	Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*



Gigabit PoE+

10/100 PoE+

	TPE-TG81g	TPE-TG83	TPE-TG82g	TPE-TG611	TPE-TG44g	TPE-TG50g	TPE-TG52	TPE-S50
Ports	8 x Gigabit PoE+	8 x Gigabit PoE+	8 x Gigabit PoE+	4 x Gigabit PoE+, 1 x Gigabit, 1 x SFP	4 x Gigabit PoE+, 4 x Gigabit	4 x Gigabit PoE+, 1 x Gigabit	4 x Gigabit PoE+, 1 x Gigabit	4 x 10/100Mbps PoE+, 2 x 10/100Mbps
PoE budget	110W	65W	61W	65W	61.6W	31W	32W	60W
Max. power per port	30W	30W	30W	30W	30W	30W	30W	30W
Switching capacity	16Gbps	16Gbps	16 Gbps	12 Gbps	16 Gbps	10Gbps	10Gbps	1.2Gbps
Jumbo frames	9KB	9KB	9KB	9KB	9KB	16KB	9KB	15KB
RAM buffer	192 KB	192 KB	128 KB	128 KB	128 KB	128KB	128KB	96KB
MAC address table	4K	4K	4K	2K	8K	8K	2K	2K
Fans	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
Power supply	Internal	External	External	External	External	External	External	Internal
Mounting	Rack	Wall	-	-	-	-	Wall	Wall
TAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com. Not available in Europe / UK.


IP Power Distribution



PDU

TPI-06


Description	Smart Power Strip
Outlets	6 management outlets, 1 outlet (Always On / not manageable)
Outlet type	NEMA 5-15R
Features	Rear facing ports, detachable power cord
Metered outlets	<input type="checkbox"/>
Surge protection	<input type="checkbox"/>
Protection modes	L-N, L-G, N-G
Peak impulse current	45,000A
Line voltage	100 ~ 120V, 50 - 60 Hz
Fuse type	Thermal Fuse
Cloud management	Hive compatible*
Power supply	Internal
Mounting	Rack
TAA/NDAA compliant	<input type="checkbox"/>
Warranty	3 year

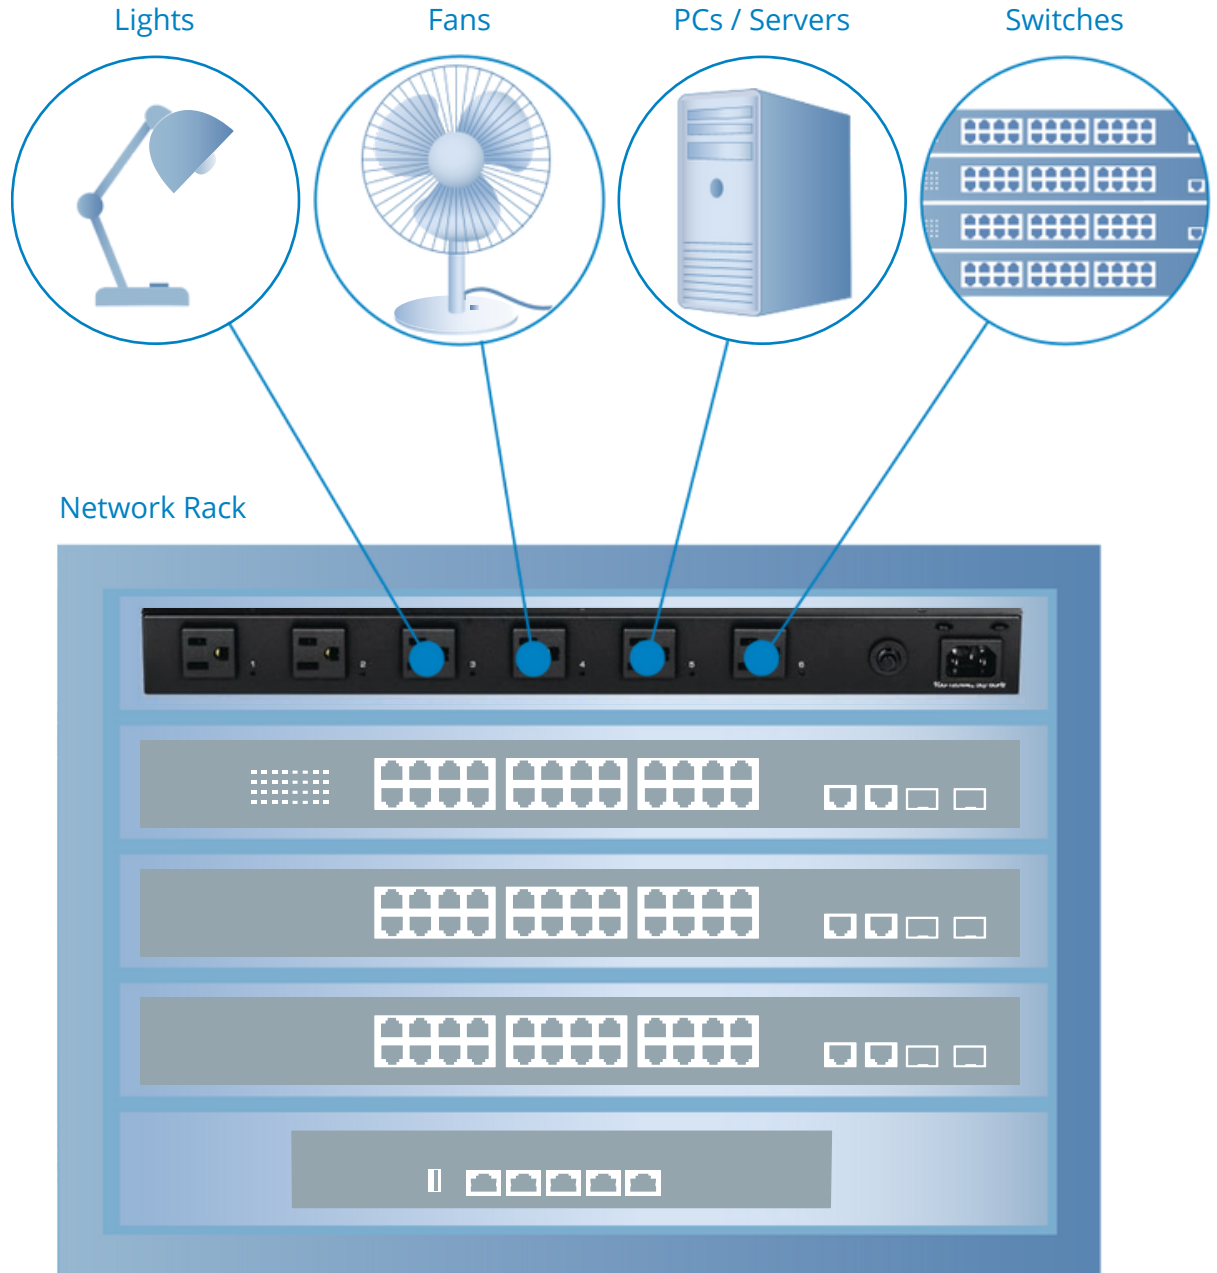



Fiber Media Converters

	TFC-10GSFP	TFC-GSFP	TFC-GMSC	TFC-PGSFP
Description	10GBASE-T to SFP+ Fiber Media Converter	1000BASE-T to SFP Fiber Media Converter	1000Base-T to 1000Base-SX Multi-Mode SC Fiber Converter	Gigabit PoE PD SFP Fiber Media Converter
Distance	Based on SFP	Based on SFP	550m / 1800 ft.	Based on SFP
Speed	10G	Gigabit	Gigabit	Gigabit
Mode	Single, Multi	Single, Multi	Multi	Single, Multi
Connector	SFP	SFP	Duplex SC	SFP
Wavelength	Based on SFP	Based on SFP	850nm	Based on SFP
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year	3 year	3 year

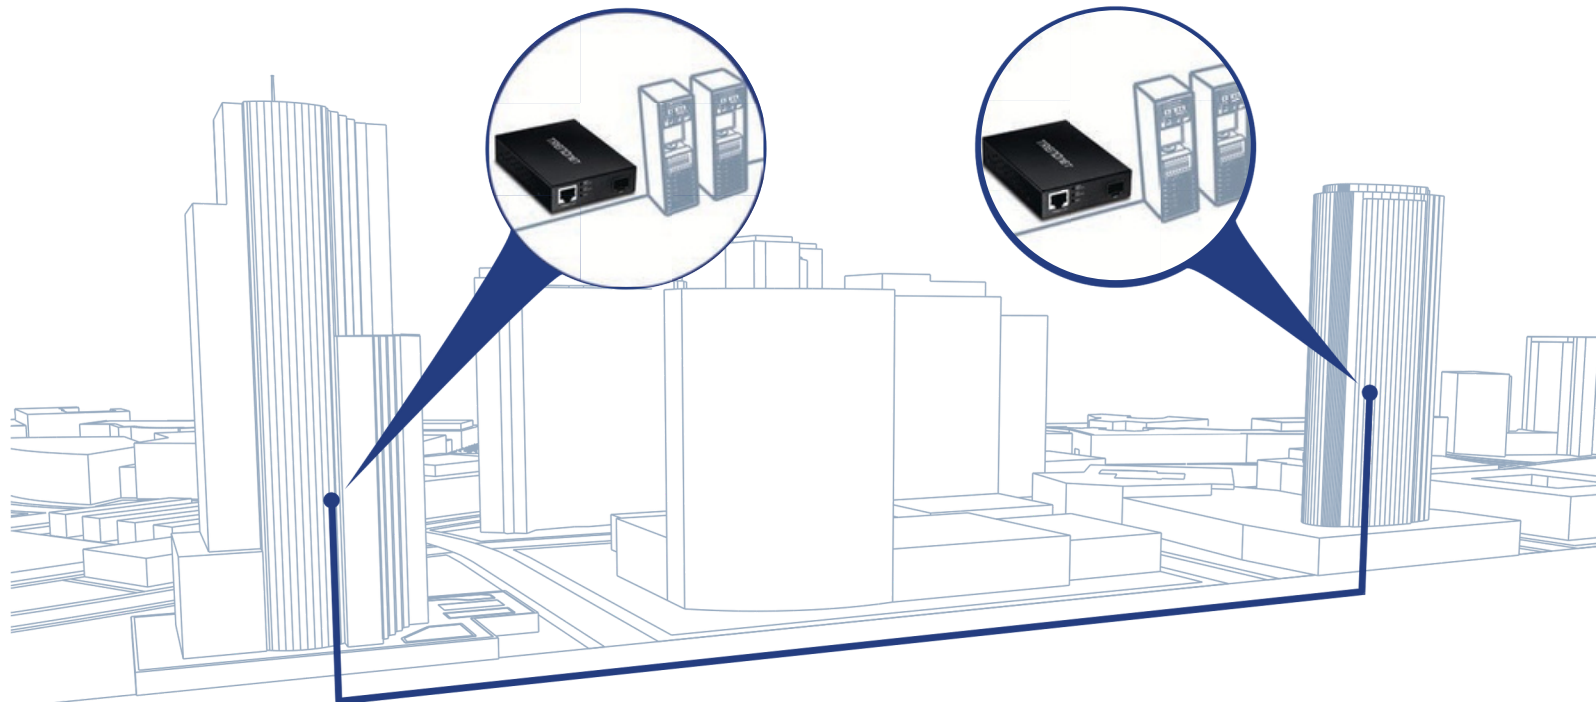

Fiber SFP Modules



	Gigabit Fiber SFP Modules						10/100 Fiber SFP Modules	
	TEG-MGBS80	TEG-MGBS40	TEG-MGBS20	TEG-MGBS10	TEG-MGBSX	TEG-MGBRJ	TE100-MGBS20	TE100-MGBFX
Distance	80km / 49.7 mi.	40km / 24.8 mi.	20km / 12.4 mi.	10km / 6.2 mi.	550m / 1,804 ft.	100m / 328 ft.	20km / 12.4 mi.	2km / 1.2 mi.
Interface	Duplex LC	Duplex LC	Duplex LC	Duplex LC	Duplex LC	Copper	Duplex LC	Duplex LC
Speed	Gigabit	Gigabit	Gigabit	Gigabit	Gigabit	Gigabit	10/100	10/100
Mode	Single	Single	Single	Single	Multi	Copper	Single	Multi
Wavelength	1550nm	1310nm	1310nm	1310nm	850nm	-	1310nm	1310nm
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*



	Gigabit Fiber SFP WDM Modules					
	TEG-MGBS40D5	TEG-MGBS40D3	TEG-MGBS20D5	TEG-MGBS20D3	TEG-MGBS10D5	TEG-MGBS10D3
Distance	40km / 24.8 mi.	40km / 24.8 mi.	20km / 12.4 mi.	20km / 12.4 mi.	10km / 6.2 mi.	10km / 6.2 mi.
Interface	Simplex LC	Simplex LC	Simplex LC	Simplex LC	Simplex LC	Simplex LC
Speed	Gigabit	Gigabit	Gigabit	Gigabit	Gigabit	Gigabit
Mode	Single	Single	Single	Single	Single	Single
WDM	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wavelength	TX: 1550nm, RX: 1310nm	TX: 1310nm, RX: 1550nm	TX: 1550nm, RX: 1310nm	TX: 1310nm, RX: 1550nm	TX: 1550nm, RX: 1310nm	TX: 1310nm, RX: 1550nm
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

Industrial Managed Switches




	Industrial L2 Managed			L2+ PoE++	Industrial L2 Managed PoE+			
	TI-G160i	TI-G102i	TI-G642i	TI-BG62i	TI-RP262i	TI-PG1284i	TI-PG102i	TI-PG541i
Ports	16 x Gigabit	8 x Gigabit, 2 x SFP	4 x Gigabit, 2 x SFP	4 x Gigabit PoE++, 2 x SFP	24 x Gigabit PoE+, 2 x SFP	8 x Gigabit PoE+, 8 x Gigabit PoE+, 4 x Gigabit SFP, 1 x Console 2 x Gigabit SFP		4 x Gigabit PoE+, 1 x Gigabit, 1 x SFP
PoE budget	-	-	-	360W	685W	240W @ 48V input, 240W @ 24V input		120W
Max. power per port	-	-	-	95W	30W	30W 30W		30W
Switching capacity	32Gbps	20Gbps	12 Gbps	12Gbps	52Gbps	24Gbps 20Gbps		12 Gbps
Jumbo frames	10KB	10KB	10KB	10KB	10KB	10KB 10KB		10KB
RAM buffer	128MB	128MB	128MB	512MB	512KB	128MB 128MB		128MB
Forwarding rate	23.8Mpps	14.88Mpps	18.9Mpps	8.9Mpps	38.7Mpps	17.86Mpps 14.8Mpps		8.93Mpps
MAC address table	8K	8K	8K	16K	8K	16K8K		8K
VLAN	Port-based, 802.1Q, MAC-based, port isolation	Port-based, 802.1Q, MAC-based, port isolation	Port-based, 802.1Q, MAC-based, port isolation	802.1Q, port-based, MAC-based, Q-in-Q VLAN, port isolation	Port-based, 802.1Q, MAC-based, port isolation	802.1Q, port-based, MAC-based, Q-in-Q VLAN, port isolation		Port-based, 802.1Q, MAC-based, port isolation
ACL	IPv4 L2-L4	IPv4 L2-L4	IPv4 L2-L4	IPv4 L2-L4	IPv4 L2-L4	IPv4 L2-L4 IPv4 L2-L4		IPv4 L2-L4
IPv6	-	-	-	IPv6 static IP address, DHCPv6 client	-	IPv6 static IP address, DHCPv6 client		-
Static IP routing								
DoS Prevention	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1ab LLDP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LACP (802.3ad)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CoS (802.1p)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spanning tree	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ERPS	STP, RSTP	STP, RSTP	STP, RSTP	STP, RSTP, MSTP	STP, RSTP	STP, RSTP, MSTP	STP, RSTP	STP, RSTP
Multicast (IGMP)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SNMP	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3
Operating temp.	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, 3	v1, v2c, v3	v1, v2c, 3	v1, v2c, v3	v1, v2c, v3
Housing	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 70° C (-40° - 158° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)
Power supply	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Mounting	TI-S15052, TI-S24052, TI-S12048**	TI-S15052, TI-S24052, TI-M6024**	TI-S15052, TI-S24052, TI-M6024**	TI-S15052, TI-S24052, TI-S48048**	TI-S15052, TI-S24052, TI-RSP100048**	TI-S15052, TI-S24052, TI-S48048**	TI-S15052, TI-S24052, TI-S48048**	TI-S15052, TI-S24052, 48VDC3000, TI-S24048**
TAA/NDAA compliant	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	Rack	DIN-Rail	DIN-Rail, Wall	DIN-Rail
Warranty	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com. **Power supply required.

Industrial Unmanaged Switches



	Industrial Gigabit Switches						Industrial 10/100 Switches	
	TI-G262 TI-G162		TI-G102 TI-G80		TI-G50 TI-G62		TI-E80	TI-E50
Ports	24 x Gigabit, 14 x Gigabit, 2 x Gigabit SFP2 x Gigabit SFP		8 x Gigabit, 2 x Shared Gigabit (RJ-45/SFP)		4 x Gigabit, 1 x SFP, 5 x Shared Gigabit (RJ-45/SFP)		8 x 10/100Mbps	5 x 10/100Mbps
Switching capacity	52Gbps 32Gbps		20Gbps 16Gbps		10Gbps 12Gbps		1.6Gbps 1Gbps	
Jumbo frames	9KB 9KB		10KB 9KB		9KB 9KB		- -	
RAM buffer	512KB 512KB		2MB 1MB		1MB 1MB		56KB 56KB	
MAC address table	8K8K		16K 8K		8K2K		1K1K	
Operating temp.	-40° - 75° C (-40° - 167° F)		-40° - 75° C (-40° - 167° F)		-40° - 75° C (-40° - 167° F)		-40° - 75° C (-40° - 167° F)	
Housing	IP30 IP30		IP30 IP30		IP30 IP30		IP30 IP30	
Power supply	TI-M6024, TI-S15052**		TI-S15052, TI-S24052, TI-M6024**				TI-S15052, TI-S24052, TI-M6024**	
Mounting	DIN-Rail, WallDIN-Rail, Wall		DIN-Rail, WallDIN-Rail, Wall		DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, WallDIN-Rail, Wall	
TAA/NDA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*		Lifetime*		Lifetime*		Lifetime*	

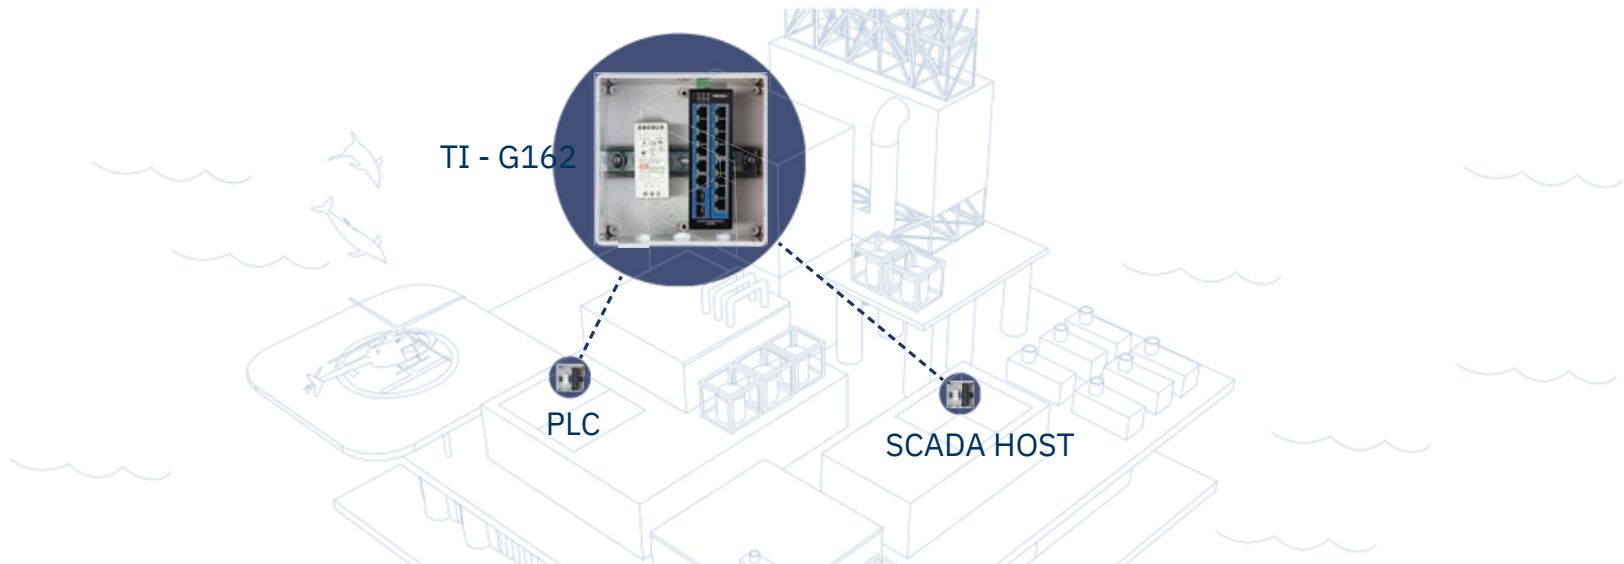

Industrial Unmanaged PoE+ Switches



	Industrial Gigabit PoE++ Switches		Industrial PoE Powered	Industrial Gigabit PoE+ Switches				
	TI-BG104	TI-UPG 62	TI-B541	TI-RP262	TI-PG262	TI-PG160	TI-PG 16 2	TI-PG102
Ports	4 x Gigabit PoE++, 4 x Gigabit PoE+, 2 x Shared Gigabit (SFP or RJ-45)	4 x Gigabit PoE++, 1 x Gigabit, 2 x SFP	4 x Gigabit PoE++ input, 1 x Gigabit PoE+ output	24 x Gigabit PoE+, 2 x Gigabit SFP	16 x Gigabit PoE+, 8 x Gigabit, 2 x Gigabit SFP	16 x Gigabit PoE+	14 x Gigabit PoE+, 2 x Gigabit SFP	8 x Gigabit PoE+, 2 x Shared Gigabit (RJ-45/SFP)
PoE budget	360W	240W	65W	685W	480W	240W	240W	240W
Max. power per port	90W	90W	90W	30W	30W	30W	30W	30W
Switching capacity	20Gbps	12Gbps	10Gbps	52Gbps	52Gbps	32Gbps	32Gbps	20Gbps
Jumbo frames	10KB	9KB	9KB	9KB	9KB	9KB	9KB	10KB
RAM buffer	2MB	1MB	1MB	512KB	4.1Mbits	512KB	512KB	2MB
MAC address table	11K	1K	2K	8K	8K	8K	8K	16K
Operating temp.	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)
Housing	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Power supply	TI-S15052, TI-S24052, TI-S24048, TI-S48048**	TI- S15052, TI- S24052, TI- S48048**	-	TI-S48048**, TI-RSP100048	TI-S48048**	TI- S15052, TI- S24052, TI- S48048**	TI- S15052, TI- S24052, TI- S48048**	TI-S15052, TI-S24052, 48VDC3000, TI-S24048**
Mounting	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	Rack	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall
TAA/NDAA compliant	☐	☐	-	-	-	☐	☐	☐
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

*See warranty policy at TRENDnet.com **Power supply required.

Industrial Unmanaged PoE+ Switches



	Industrial Gigabit PoE+ Switches						Industrial 10/100 PoE+ Switches	
	TI-PGM102	TI-PG80	TI-PG62	TI-PG 541	TI-PG50	TI-PGM541	TI-PE80	TI-PE50
Ports	8 x Gigabit PoE+, 2 x Gigabit SFP	8 x Gigabit PoE+	4 x Gigabit PoE+, 1 x SFP, 1 x Shared Gigabit (RJ-45/SFP)	4 x Gigabit PoE+, 1 x Gigabit, 1 x SFP	4 x Gigabit PoE+, 1 x Gigabit	4 x Gigabit PoE+, 1 x Gigabit SFP	8 x 10/100Mbps PoE+	4 x 10/100Mbps PoE+, 1 x 10/100Mbps
PoE budget	240W	200W	120W	120W	120W	120W	200W	90W
Max. power per port	30W	30W	30W	30W	30W	30W	30W	30W
Switching capacity	20Gbps	16Gbps	12 Gbps	12 Gbps	10Gbps	10 Gbps	1.6Gbps	1Gbps
Jumbo frames	9KB	9KB	9KB	10KB	9KB	9KB	-	-
RAM buffer	1.5MB	1MB	1MB	512KB	128KB	8KB	1MB	56KB
MAC address table	4K	8K	1K	8K	2K	2K	1K	1K
Operating temp.	-20° - 65° C (-4° - 149° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)	-20° - 65° C (-4° - 149° F)	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)
Housing	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Power supply	TI-S15052, TI-S24052, TI-S24048**	TI-S15052, TI-S24052, TI-S24048**	TI-S15052, TI-S24052, 48VDC3000, TI-S12048, TI-S24048**	TI-S15052, TI-S24052, TI-S12048, TI-S24048**	TI-S15052, TI-S24052, TI-S12048**	TI-S15052, TI-S24052, TI-S24048**	TI-S15052, TI-S24052, TI-S24048**	TI-S15052, TI-S24052, TI-M6024, TI-S12048*
Mounting	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*

Industrial Specialty Switches & PoE Solutions



	Variable Voltage Switches		Front Access Switches				EN50155 M12 Switch
	TI-PG80B TI-PG62B			TI-PG102F TI-PG80F TI-PG62F TI-PG50F			TI-XPG50
Ports	4 x Gigabit PoE+, 8 x Gigabit PoE+ 2 x SFP		8 x Gigabit PoE+, 4 x	8 x Gigabit PoE+, Gigabit PoE+, 4 x Gigabit PoE+, 2 x SFP2 x Gigabit SFP1 x Gigabit			4 x M12 Gigabit PoE+, 1 x M12 Gigabit
PoE budget	120W - 200W60 - 120W			240W 200W 120W 120W			120W@56V DC
Max. power per port	30W 30W			30W 30W 30W 30W			30W
Switching capacity	16Gbps 12Gbps			20Gbps 16Gbps 12Gbps 10Gbps			10Gbps
Jumbo frames	9KB 9KB			10KB 9KB 10KB 9KB			9KB
RAM buffer	1MB 1MB		256KB 1MB 128KB 1MB				1MB
MAC address table	4K1K			16K 4K 1K 2K			2K
Operating temp.	-40° - 75° C (-40° - 167° F)			-40° - 75° C (-40° - 167° F)			-40° - 75° C (-40° - 167° F)
Housing	IP30 IP30			IP30 IP30 IP30 IP30			IP67
Power supply	TI-S15052, TI-S24052, TI-S15052, TI-S24052, TI-S24048, TI-S12024**TI-S12024, TI-S12048**		TI-S15052, TI-S24052, TI-S24048, TI-S48048, 48VDC3000**	TI-S15052, TI-S24052, TI-S12048, TI-S15052, TI-S24052, TI-S24048, TI-S24048, 48VDC3000**TI-S48048, 48VDC3000**			TI-S15052
Mounting	DIN-Rail, WallDIN-Rail, Wall			DIN-Rail, WallDIN-Rail, WallDIN-Rail, MagnetDIN-Rail, Wall			DIN-Rail, Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
Warranty	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Lifetime*
	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*	



	Injectors				Extenders			Splitter
	TI-IG290 TI-IG90		TI-IG60 TI-IG30		TI-BE200 TI-EU120	TI-BEP200 TI-E100		TI-SG104
Description	2-Port 2.5G PoE++ InjectorPoE++ Injector		UPoE InjectorPoE+ Injector		2-Port Outdoor PoE++2-Port Outdoor Extender Extender	UPoE+ Active/ PoE+ Extender Passive PoE+ Extender		UPoE Splitter
PoE budget	180W 90W		60W 30W		60W 64W	60W 30W		-
Operating temp.	-40° - 75° C (-40° - 167° F)		-40° - 75° C (-40° - 167° F)		-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)		-40° - 80° C (-40° - 185° F)
Housing	IP30 IP30		IP30 IP30		IP67 IP67	IP67 IP30		IP30
Power supply	TI-S15052, TI-S24052, TI-S15052, TI-S24052, TI-S24048** TI-S12048**		TI-S15052, TI-S24052, TI-S15052, TI-S24052, TI-S12048** TI-S12048**		power input: 30W, 60W, 95W PoE++ PD	PoE++TI-S15052, TI-S24052, TI-S12048**		DC output: 12V, 16V, 24V, 48V
Mounting	DIN-Rail, WallDIN-Rail, Wall		DIN-Rail, WallDIN-Rail, Wall		Wall Wall	WallDIN-Rail, Wall		DIN-Rail, Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year	3 year	3 year	3 year	3 year	3 year	3 year

*See warranty policy at TRENDnet.com **Power supply required.

Industrial Fiber



	Industrial Gigabit Fiber Converters			Industrial 100Mbps Fiber Converters	
	TI - UF11SFP	TI- PF11SFP	TI - F11SFP	TI-F10S30	TI-F10SC
Description	SFP to Gigabit UPoE	SFP to Gigabit PoE+	100/1000BASE-T to SFP	100BASE-FX Single-Mode SC	100BASE-FX Multi-Mode SC
Distance	Based on SFP	Based on SFP	Based on SFP	30km (18.6 mi.)	2km (1.2 mi.)
Fiber mode	Based on SFP	Based on SFP	Based on SFP	Single	Multi
Fiber connector	SFP	SFP	SFP	Duplex SC	Duplex SC
PoE budget	60W	30W	-	-	-
Wavelength	Based on SFP	Based on SFP	Based on SFP	1310nm	1310nm
Operating temp.	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)	-40° – 75° C (-40° – 167° F)
Housing	IP30	IP30	IP30	IP40	IP40
Power supply	TI-S15052, TI-S24052, TI-S12048** TI-S15052, TI-S24052, TI-S12048** TI-S15052, TI-S24052, TI-M6024**			TI-S15052, TI-S24052, TI-M6024**	TI-S15052, TI-S24052, TI-M6024**
Mounting	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall	DIN-Rail, Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year	3 year	Lifetime*	Lifetime*




	Industrial SFP Modules		
	TI-MGBS40	TI-MGBS10	TI-MGBSX
Distance	40km / 24.8 mi.	10km / 6.2 mi.	550m / 1,804 ft.
Interface	Duplex LC	Duplex LC	Duplex LC
Speed	Gigabit	Gigabit	Gigabit
Fiber mode	Single (40km)	Single (10km)	Multi (550m)
Wavelength	1310nm	1310nm	850nm
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*	Lifetime*



	Industrial PoE+ Router	Industrial Router
	TI-WP100	TI-W 100
Wireless rating	AC1200	AC1200
Max. data rate / WiFi band	867Mbps (AC)+ 300Mbps (N)	867Mbps (AC)+ 300Mbps (N)
Ports	4 x Gigabit PoE+, 1 x Gigabit WAN	4 x Gigabit, 1 x Gigabit WAN
PoE budget	120W	-
Max. power per port	30W	-
Features	802.11ac dual band WiFi, PoE+, VPN router, Multi-WAN (Ethernet & WiFi), Modbus	802.11ac dual band WiFi, VPN router, Multi-WAN (Ethernet & WiFi), Modbus
VPN	IPsec, SSL VPN	IPsec, SSL VPN
Multi-WAN	Fail-over, load balancing	Fail-over, load balancing
Access controls	MAC filter, DMZ, Port Forwarding, SPI, IPS	MAC filter, DMZ, Port Forwarding, SPI, IPS
Management	HTTP / HTTPS, Telnet / SSH	HTTP / HTTPS, Telnet / SSH
VLAN	802.1Q VLAN, Inter-VLAN routing, multiple SSID w/ VLAN tagging	802.1Q VLAN, Inter-VLAN routing, multiple SSID w/ VLAN tagging
Scheduling	Auto power cycle, radios on/o	Auto power cycle, radios on/o
Operating temp.	-30° - 70° C (-22° - 158° F)	-30° - 70° C (-22° - 158° F)
Housing	IP30	IP30
Mounting	DIN-Rail	DIN-Rail
Power supply	TI-S15052, TI-S24052, TI-S12048, TI-S12024, TI-S24048**	TI-M 6024**
Antenna base	TE W - LB101***	TEW-LB101***
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year



	Industrial Modbus Gateways	
	TI-M42	TI-M12
Ports	4 x Serial (DB-9), 2 x 10/100Mbps	1 x Serial (DB-9), 2 x 10/100Mbps
Serial connections	RS-232, RS-422, RS-485	RS-232, RS-422, RS-485
Operating temp.	-40° - 75° C (-40° - 167° F)	-40° - 75° C (-40° - 167° F)
Housing	IP30	IP30
Power supply	TI-S15052, TI-S24052, TI-M6024, 48VDC3000**	TI-S15052, TI-S24052, TI-M6024, 48VDC3000**
Mounting	DIN-Rail, Wall	DIN-Rail, Wall
TAA/NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	Lifetime*	Lifetime*

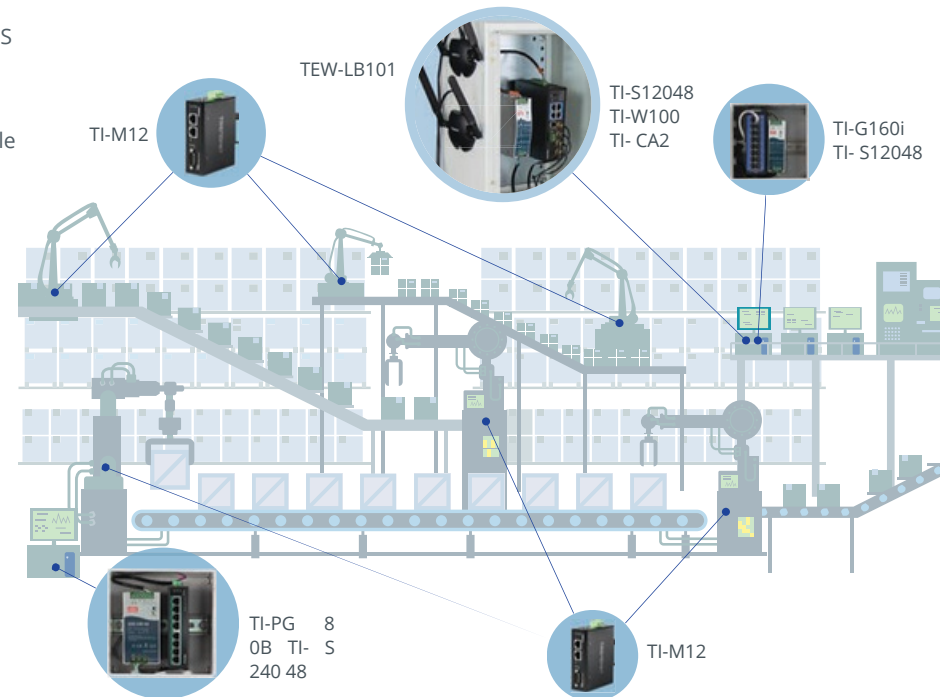


*See warranty policy at TRENDnet.com **Power supply required.***Sold separately.

SMB Routers



Business Routers

	TEW-929DRU	TEW-829DRU	TWG-431BR
Wireless rating	AX1800	AC3000	-
Max. data rate / WiFi band	1201Mbps (5GHz) + 574Mbps (2.4GHz)	1733Mbps (5GHz1) + 867Mbps (5GHz2) + 400Mbps (2.4GHz)	-
Ports	1 x 2.5G LAN, 2 x Gigabit LAN, 2 x Gigabit WAN, 1 x USB 2.0, 1 x RJ-45 Console	8 x Gigabit LAN, 2 x Gigabit WAN, 1 x USB 3.0, 1 x RJ-45 Console	5 x Gigabit (4WAN + 1LAN OR 4LAN + 1WAN), 1 x USB 3.0, 1 x RJ-45 Console
Features	Bark*, Mutli-WAN, VPN router, rack mountable, wall mountable	Mutli-WAN, VPN router, rack mountable, wall mountable	Mutli-WAN, VPN router, rack mountable
VPN	PPTP / L2TP, L2TP w/ IPsec, IPsec, SSL VPN	PPTP / L2TP, L2TP w/ IPsec, IPsec, SSL VPN	PPTP / L2TP, L2TP w/ IPsec, IPsec, SSL VPN
Multi-WAN	Fail-over, load balancing, WAN protocol binding	Fail-over, load balancing, WAN protocol binding	Fail-over, load balancing
Access controls	Bark*, MAC / IP fi lter, DMZ /Port Forwarding / One-to-One NAT	MAC / IP fi lter, DMZ / Port Forwarding / One-to-One NAT	MAC / IP fi lter,DMZ / Port Forwarding
Management	HTTP / HTTPS, Telnet / SSH, Console	HTTP / HTTPS, Telnet / SSH, Console	HTTP / HTTPS, Telnet / SSH, Console
VLAN	802.1Q VLAN / Inter-VLAN routing; multiple SSID w/ VLAN tagging	802.1Q VLAN / Inter-VLAN routing; multiple SSID w/ VLAN tagging	802.1Q VLAN / Inter-VLAN routing
Scheduling	Auto power cycle, auto update, radios on/o	Auto power cycle, auto update, radios on/o	Auto power cycle, auto update, WoL
TAA compliant			-
NDAA compliant	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Warranty	3 year	3 year	3 year

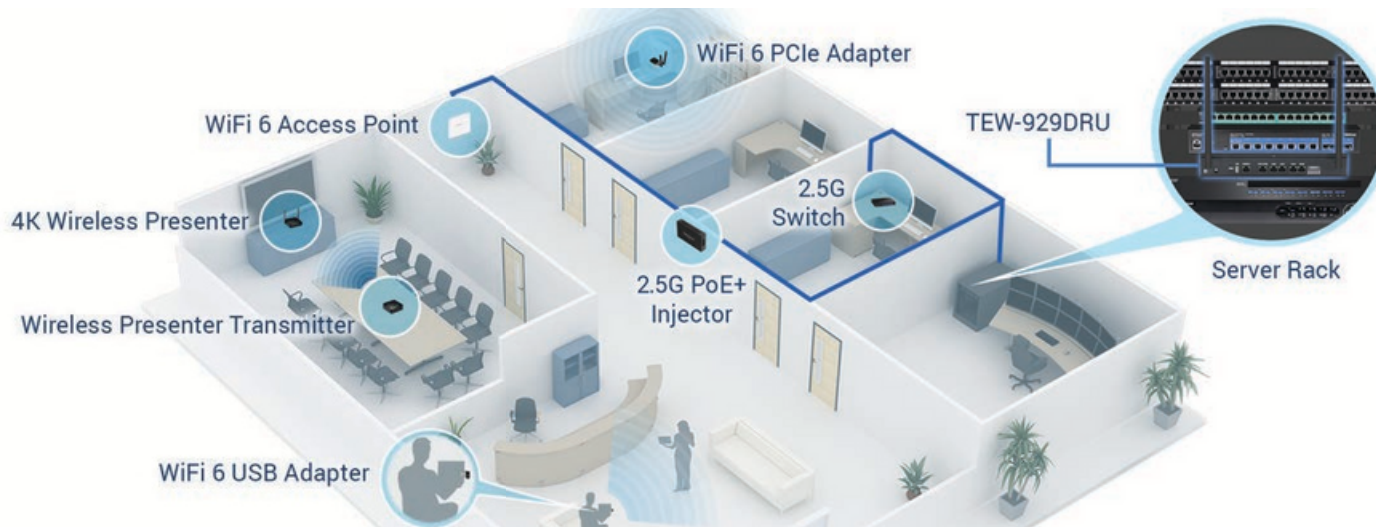

Indoor PoE Access Points



	Indoor						
	TEW-925 DAP	TEW-923 DAP	TEW-921DAP	TEW-826DAP	TEW-825DAP	TEW-823 DAP	TEW-821DAP
Features	WiFi 6 AX5400	WiFi 6 AX3000	WiFi 6 AX1800	Wireless Wave 2 AC2200	Wireless AC1750	Wireless AC1300	Wireless Wave 2 AC1200
Max. data rate / WiFi band	4800Mbps / 5GHz 574Mbps / 2.4GHz	2402Mbps / 5GHz 574Mbps / 2.4GHz	1201Mbps / 5GHz AX 567Mbps / 2.4GHz AX	867Mbps / 5GHz AC1 867Mbps / 5GHz AC2 400Mbps / 2.4GHz N	1300Mbps / 5GHz AC 450Mbps / 2.4GHz N	867Mbps / 5GHz AC 400Mbps / 2.4GHz N	867Mbps / 5GHz AC 300Mbps / 2.4GHz N
Ports	1 x 2.5G PoE+	1 x 2.5G PoE+	1 x Gigabit PoE+	1 x Gigabit PoE+, 1 x Gigabit	1 x Gigabit PoE+	1 x Gigabit PoE	1 x Gigabit PoE
Antenna strength	2.4GHz: 2 x 4.5 dBi 5GHz: 2 x 5 dBi	2.4GHz: 2 x 4.5 dBi 5GHz: 2 x 5.5 dBi	2.4GHz: 2 x 3.2 dBi 5GHz: 2 x 4.3 dBi	2.4GHz: 2 x 4 dBi 5GHz1: 2 x 4 dBi 5GHz2: 2 x 4 dBi	2.4GHz: 3 x 4 dBi 5GHz: 3 x 4 dBi	2.4GHz: 2 x 3 dBi 5GHz: 2 x 4 dBi	2.4GHz: 2 x 3 dBi 5GHz: 2 x 4 dBi
Cloud management	Hive compatible* (Firmware upgrade required)	Hive compatible* (Firmware upgrade required)	Hive compatible*	Hive compatible*	Hive compatible*	-	Hive compatible*
Management utility	<input type="checkbox"/>	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wireless Distribution System (WDS)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Repeater mode	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Client mode	AP Client	AP Client	AP Client	AP Client	AP Client	AP Client	AP Client
Additional SSIDs	16 (8 per band)	16 (8 per band)	16 (8 per band)	24 (8 per band)	16 (8 per band)	16 (8 per band)	16 (8 per band)
Max. encryption	WPA2	WPA2	WPA3	WPA2	WPA2	WPA2	WPA2
Operating temp.	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)
Mounting hardware	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Housing	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
TAA/NDAA compliant	IP30	IP30	-	IP30	IP30	IP30	IP30
Warranty	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	3 year	3 year	3 year	3 year	3 year	3 year	3 year

*Additional fee applies. Not available in Canada. Not available in Europe / UK.

Outdoor PoE Access Points



	Outdoor							
	TEW-941APBO	TEW-940APBO	TEW-940APBO2K	TEW-841APBO	TEW-840APBO	TEW-840APBO2K	TEW-740APBO	TEW-740APBO2K
Features	Wireless AX1800, Omni-Directional, Point-to-Point, Point-to-Multi-Point	Wireless AX1200, Point-to-Point / CPE	Wireless AX1200, Preconfigured, Point-to-Point, Bridge Kit	Wireless AC1300, Omni-Directional, Point-to-Point, Point-to-Multi-Point	Wireless AC867, Point-to-Point / CPE	Wireless AC867, Preconfigured, Point-to-Point, Bridge Kit	Wireless N300, Point-to-Point / CPE	Wireless N300, Preconfigured, Point-to-Point, Bridge Kit
Max. data rate / WiFi band	1201Mbps / 5GHz AX 867Mbps / 5GHz AC 573Mbps / 2.4GHz AX	1201Mbps / 5GHz AX 867Mbps / 5GHz AC 300Mbps / 5GHz N	1201Mbps / 5GHz AX 867Mbps / 5GHz AC 300Mbps / 5GHz N	867Mbps / 5GHz AC 400Mbps / 2.4GHz N	867Mbps / 5GHz AC		300Mbps / 2.4GHz N	
Ports	300Mbps / 2.4GHz PoE+	1 x Gigabit Proprietary PoE, 1 x Gigabit LAN2		2 x Gigabit PoE+	1 x Gigabit Proprietary PoE, 1 x Gigabit LAN2		1 x 10/100Mbps Proprietary PoE, 1 x 10/100Mbps LAN2	
Antenna strength	2.4GHz: 2 x 5 dBi 5GHz: 2 x 5 dBi	14 dBi directional	14 dBi directional	4 x 5 dBi	14 dBi directional		10 dBi directional	
Management utility	-	-	-	-	-		-	
Wireless Distribution System (WDS)	-	-	-	☐	☐		☐	
Repeater mode	☐	☐	☐	-	-		-	
Client mode	Client Bridge	Client Bridge	Client Bridge	Client Bridge	Client Bridge + AP, WISP (CPE) + AP		Client Bridge + AP, WISP (CPE) + AP	
Additional SSIDs	16 (8 per band)	8	8	16 (8 per band)	7		7	
Max. encryption	WPA3	WPA3	WPA3	WPA2	WPA2		WPA2	
Operating temp.	-22° – 60° C (-7.6° – 140° F)	-22° – 60° C (-7.6° – 140° F)		-25° – 60° C (-13° – 140° F)	-20° – 60° C (-4° – 140° F)		-20° – 60° C (-4° – 140° F)	
Mounting hardware	☐	☐	☐	☐	☐		☐	
Housing	IP67	IP55	IP55	IP67	IP56		IPX6	
TAA/NDAA compliant	☐	☐	☐	☐	☐		☐	
Warranty	3 year3 year	3 year		3 year	3 year		3 year	

PoE Surveillance Cameras & Network Video Recorder



	Fixed Dome Camera	Fixed Turret Camera
	TV-IP1515PI	TV-IP1514PI
Features	5MP HD H.265 w/ Night Vision	5MP HD H.265 w/ Night Vision
Connectivity	PoE	PoE
Free app	Sentinel mobile app for Android™ or iOS™	Sentinel mobile app for Android™ or iOS™
Free software	Manage up to 144 TRENDDnet cameras with View Manager	Manage up to 144 TRENDDnet cameras with View Manager
Housing	IP66	IP66
Compression	H.265, H.264	H.265, H.264
Max. resolution	2592 x 1920	2592 x 1920
Image sensor	1/2.7" CMOS	1/2.7" CMOS
Lens	3.6mm @ F1.6	3.6mm @ F1.6
Viewing angle	106°	106°
Zoom	-	-
Audio support	Built-in microphone	Built-in microphone
Vision	Night vision up to 30m (98 ft.)	Night vision up to 30m (98 ft.)
Pan & tilt	Fixed position: Manually pan 355° & tilt 75°	-
Network	IPv4, IPv6	IPv4, IPv6
ONVIF	Profile S	Profile S
Power consumption	6W max.	5.5W max.
Micro SD slot	□ (up to 256GB)	□ (up to 256GB)
Operating temp.	-30° – 50° C (-22° – 122° F)	-30° – 50° C (-22° – 122° F)
Hardware	Mounting hardware included	Mounting hardware included
TAA/NDA	□	□
Compliant Warranty		3 year

	H.265 4K PoE NVR
	TV-NVR1508
Features	Advanced camera viewing, recording, and playback
Channels	8
PoE budget	60W
Hard drive	1 × 3.5 HDD up to 10TB
Video interface	1 × HDMI, 1 × VGA
USB ports	-
Recording time*	Over one month of continuous 1080p HD recording
Viewing modes	1, 4, 8, 9
PTZ support	□
Audio support	□
Web GUI interface	□
Export file type	H.265, H.264
Mobile app	□
Compatible cameras	Compatible with TRENDDnet & third-party PoE cameras
Mounting	Rack
TAA/NDA	□
Warranty	2 year

* Based on maximum camera channels and maximum storage capacity.

See
TRENDnet's
full product catalog
online at
www.trendnet.com

Powerline



Powerline Adapters
WiFi Powerline Adapters

MoCA®



Ethernet Over Coax Adapters

USB & USB-C



Network Adapters •
Hubs RS-232 Serial
Converters

Home Wireless



Mesh Routers • Routers
Access Points • USB Adapters
Bluetooth Adapters
WiFi / Bluetooth® Adapters

WiFi Presenter



4K Wireless Presenter Kit
w/ Audio Support

KVMs



Rackmount • Desktop
DisplayPort • KVM Extenders
HDMI • VGA • Video Splitters
USB Share Switch

Patch Panels



Shielded • Unshielded • Modular
Angled • Wall Mount
Keystone Jacks

Headquarters Address

20675 Manhattan Place
Torrance, CA 90501
USA

www.TRENDnet.com

Main Phone Number

310-961-5500

info@trendnet.com



Toll Free Number

888-326-6061

Department

North America Sales
(US, Canada, UK)

Extension 1

sales@trendnet.com

International Sales

Extension 2

intlsales@trendnet.com (EMEA, APAC)
latam@trendnet.com (LATAM)

Marketing

marketing@trendnet.com

Customer Service

Extension 3

Online Feedback System
www.trendnet.com/company/feedback/

Pre-Sales

Extension 4

Technical Support

866-845-3673

Online Help Desk Ticket System
www.trendnet.com/support/helpdesk

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein. Some information may have changed since the printing of this catalog. For the latest product information and to view our complete product line, please visit our website. © Copyright 2023 TRENDnet, Inc. All Rights Reserved.

TRENDNET[®]

Networks People Trust[™]



DISTRIBUIDOR
AUTORIZADO

Contáctanos:

GDL:3336162912

CDMX:5552600598

MTY: 814 738 20 92

LEON:477 152 14 72

Whatsapp: 3336162912